

A	Dept	
	Qty	
	DC	1
	ED	1
B	IE	1
	ISO	1
	PD	1
	R&D	1
	SD	1
	QA	1
B	QC	1
	QE	1

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms)
For 1 Minute.
4. Current Rating:3A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: PBT,Black,UL94-V0.

Product Number Code:

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms)
For 1 Minute.
4. Current Rating:3A.
5. Temperature: -40°C~+105°C.



Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: PBT,Black,UL94-V0.

Product Number Code:

DS1023-73 - X X X X X X

- Packing Type
T:Tray
- Housing Color
B:Black
- Contact Plating
8:Gold Flash
- Mounting Type
R:R/A Type
- Connector Type
S:Socket
- No. of contacts
1x2 - 1x40
2x2 - 2x40

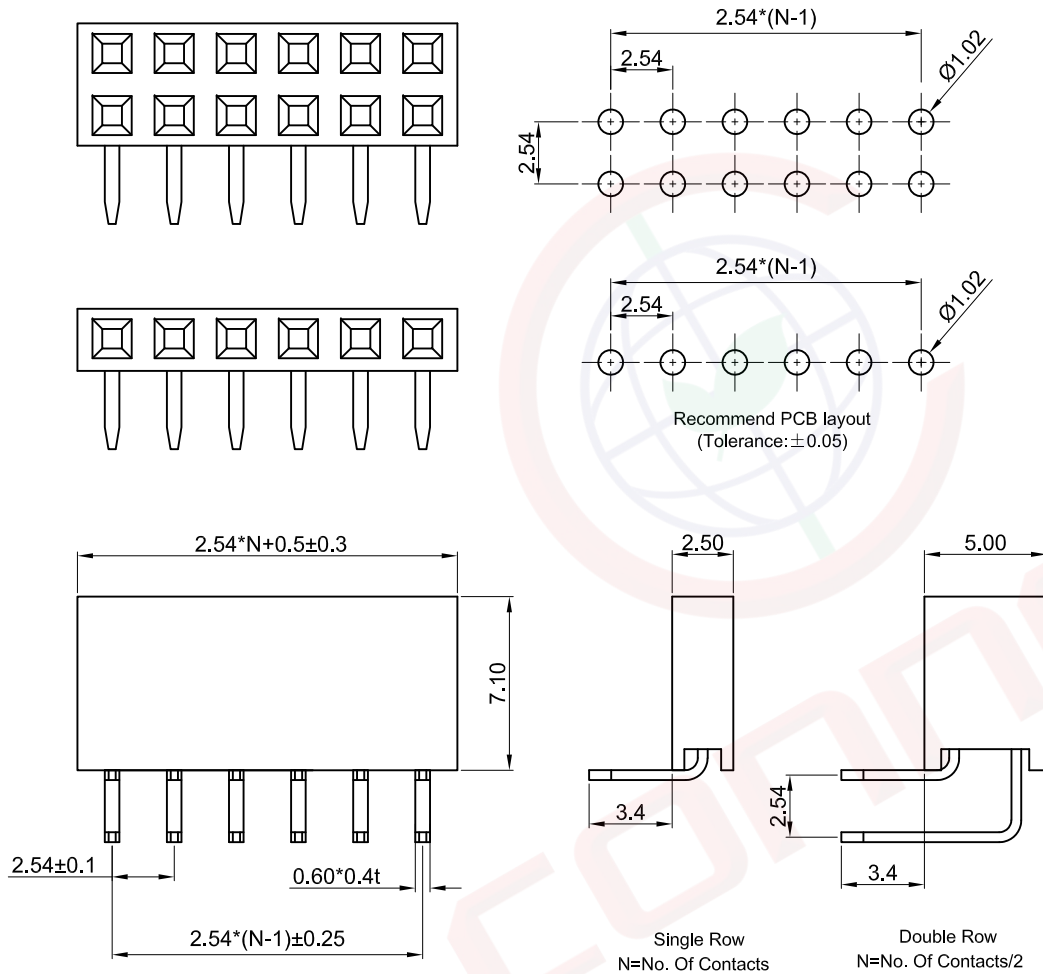

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Female Header	
X.	±0.60	X.	±5°	UNITS	mm	R/A Type H=7.1mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1023-73 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1023-73-XXXXXX-A							