


A	Dept	Qty
	DC	1
	ED	1
	IE	1
B	ISO	1
	PD	1
	R&D	1
	SD	1
	QA	1
	QC	1
	QE	1

Technical drawings of a lock nut and washer assembly. The drawings include:

- Assembled:** A perspective view of the lock nut and washer assembly.
- A Lock Nut:** A perspective view of the lock nut, showing its hexagonal shape and locking features.
- B Washer:** A perspective view of the washer, showing its circular shape and central hole.
- C Body:** A cross-sectional view of the body, showing the internal threads and the locking mechanism. Dimensions $L1$ and $L2$ are indicated.
- D Seal:** A perspective view of the seal, showing its rectangular shape and central hole.



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Plastic fixed cable gland PG type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1170-08 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 2					
DRAWING NO.	C-DS1170-08-XXX-A							

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/27/24'		

Notes:

Specifications:

1. Temperature: -20°C~+80°C.

Materials:

1. Material: Parts A, C, E are made of Nylon or PP; Parts B and D are made of NBR.

Product Number Code:

DS1170-08 — X X X

Materials type
N: Nylon P: PP

Color
A: Gray B: Black

Model
PG7 PG9

.....
PG42 PG48

Materials type
N: Nylon P: PP

Color
A: Gray B: Black

Model
PG7 PG9


.....
PG42 PG48

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of any part of this document without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Model	Cable Range(mm)	Thread O.D.L1(mm)	Thread Length L2(mm)	Spanner Size A&E(mm)
M8	2~4.8	8	7.5	13/12
M10	3~6	10	8	15/13
M12	3~6.5	12	8.5	18/15
M12L	3~6.5	12	15	17/16
M16	4~8	16	10	22/19
M18	5~10	18	10	24/22
M20	6~12.5	20	10	27/24
M22	8.5~14	22	11	27/27
M24	8.5~14	24	11	27/27
M25	8.5~14	25	11.6	33/27
M32	14~22	32	15	41/42
M36	14~22	36	12	45/42
M40	23~32	40	15	50/52
M50	30~41	50	15	62/62
M63	35~46	63	18	75/65



(Series Image-Reference Only)

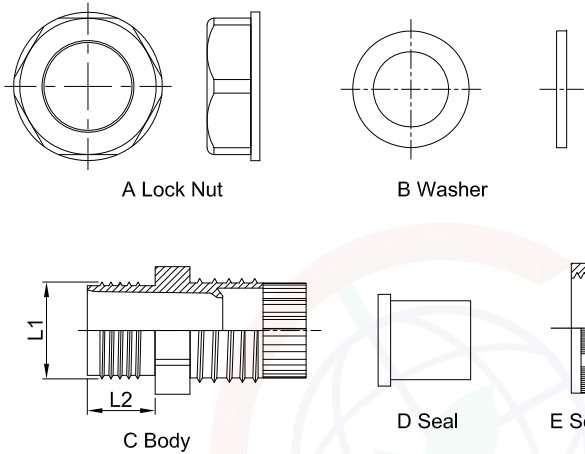

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/27/24'		

Notes:
Specifications:
1. Temperature: -20°C~+80°C.
Materials:
1. Material:Parts A,C,E are made of Nylon or PP;Parts B and D are made of NBR.
Product Number Code:
DS1170-08 - X X X

Materials type
N: Nylon P: PP
Color
A: Gray B: Black
Model
M8 M10 M12 M12L
.....
M50 M63

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Plastic fixed cable gland M type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1170-08 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	2 OF 2					
DRAWING NO.	C-DS1170-08-XXX-A							