
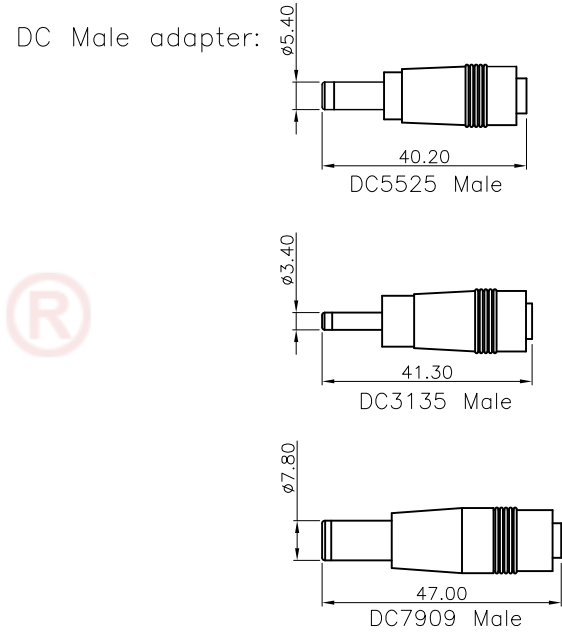
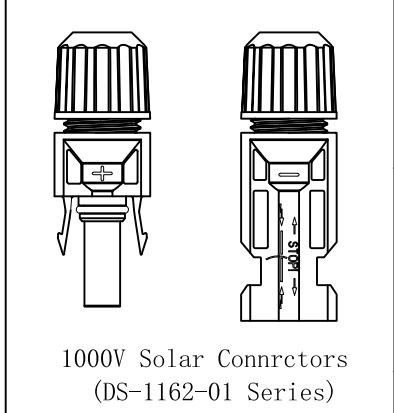


The information provided herein is from CONFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are reserved by CONFLY Electronic Co., Ltd. and its affiliates. CONFLY Electronic Co., Ltd. and its affiliates do not constitute authorization of its use in any format or manner. CONFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 02/24/25'		

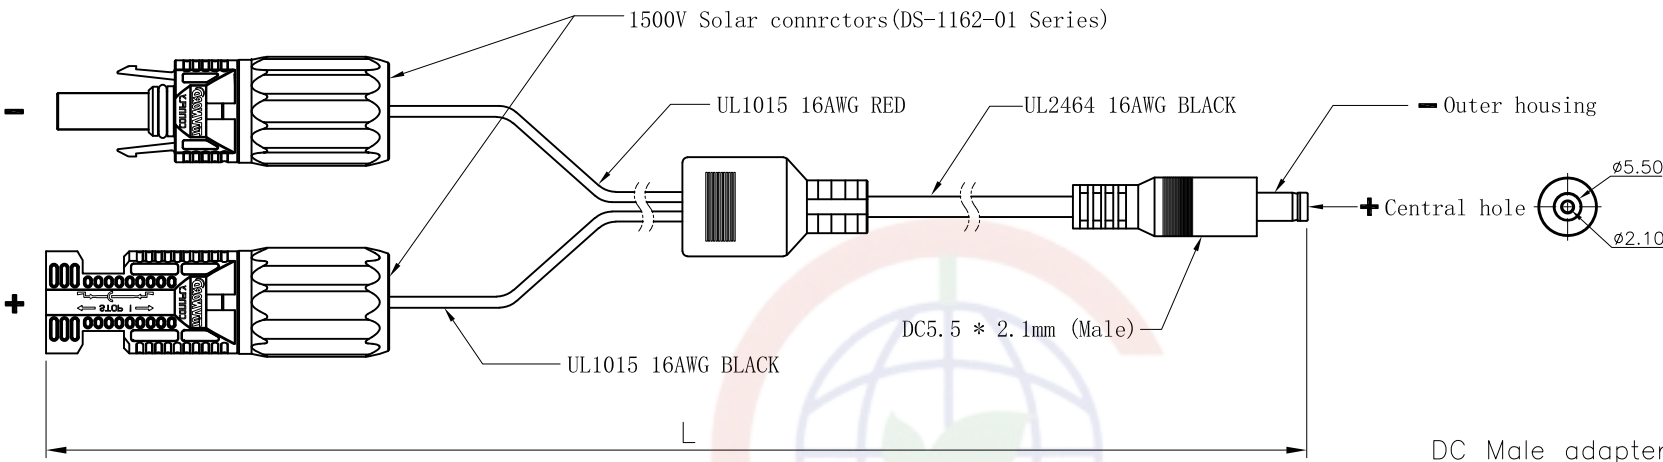

DC Central hole(+) to the solar panel connector female(-) plug of this cable.  
DC Outer housing(-) to the solar panel connector male(+) plug of this cable.

Note:

Specifications:

1. Rated voltage:12-24V DC
2. Rated current:16A
3. Rated power:190W
4. Operation Temperature Range:+80° C



Materials:

1. Cable core Insulation material:PVC
2. DC Insulation:Plastic, Black
3. DC Contact:Copper Alloy,Plating Nickel
4. Solar connrctors Contact:Red Copper,Tin plated.

Product Number Code:

DS1196-03-X X X X X

- Wire length(Dim L):  
1500:1500mm...
- Wire diameter:  
1:16AWG
- Wire gauge:  
1:UL1015+UL2464
- Voltage Type(Solar connrctors):  
1:1000V 2:1500V
- No. of connector:  
A:Solar connrctors+DC5.5 \* 2.1(Male)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Solar connector to DC5.5 * 2.1 male power cord	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES		
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			<div><div>晨翔电子有限公司</div><div>CONFLY CONFLY ELECTRONIC CO. LTD</div></div>			
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1196-03-XXXX-A						